


# StoTherm® ci XPS

Decorative cladding with R-5 continuous insulation and StoGuard® Air and Water-resistive Barrier combined with Sto high performance finishes

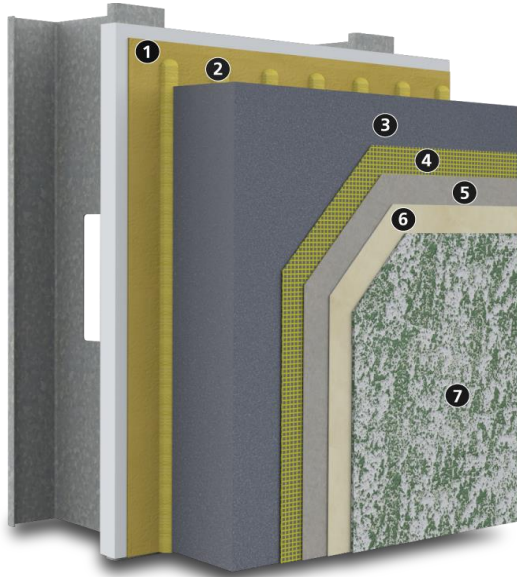

Substrate: Glass Mat Gypsum sheathing in compliance with ASTM C1177, Exterior or Exposure I wood-based sheathing (plywood or OSB), cement board in compliance with ASTM C1325, or code compliant concrete, concrete masonry or portland cement plaster, existing structurally sound, uncoated brick or other masonry wall construction.

1)	Air Barrier and Water-resistive Barrier: StoGuard
2)	Adhesive: Sto TurboStick®
3)	Insulation: XPS Type X Insulation listed by Sto Corp.: <ul style="list-style-type: none"> <li>Dupont™ Styrofoam™ Brand Panel Core ST-100</li> </ul>
4)	Reinforcement: Sto Mesh (embedded in Sto base coat)
5)	Base Coat options: Sto BTS Plus, Sto BTS Xtra, Sto Primer/Adhesive, Sto Primer/Adhesive-B
6)	Primer: StoPrime Sand (optional)
7)	Finish: choose among, <ul style="list-style-type: none"> <li>Sto Textured Finishes</li> <li>StoCast Finishes</li> <li>Sto Signature and Sto Specialty Finishes</li> </ul>

System Accessory: StoSeal STPE Sealant for use as an exterior weather seal around wall penetrations, at dynamic joints in wall construction, and as an interior air seal for air barrier continuity

### System Description

StoTherm ci XPS is a decorative and protective exterior wall cladding that combines superior air and weather tightness with excellent thermal performance and durability. It incorporates continuous exterior insulation and StoGuard Air and Water-resistive Barrier with Sto's high performance finishes in a fully tested wall cladding assembly.

### Uses

StoTherm ci XPS can be used in residential or commercial wall construction where energy efficiency, superior aesthetics, and air and moisture control are essential in the climate extremes of North America.

Features	Benefits
Design versatility	Aesthetic and curb appeal easy to achieve
Continuous exterior insulation, R-5 per inch, no mechanical fasteners	Energy efficient, reduced heating and cooling costs
Quick-set adhesive, no mechanical fasteners	Fast installation, no thermal bridging
Continuous air and water-resistive barrier	Protects against mold and moisture problems
ICC-ES listed and evaluated	Fully tested building code compliant assembly

### Properties

Weight (not including sheathing and frame)	< 2 psf (10 kg/m <sup>2</sup> )
Thickness (insulation)	1 to 6 inches (25 – 152 mm)
R-value (not including sheathing and frame)	5.0 – 30 ft <sup>2</sup> •h•°F / Btu (0.88-5.28 m <sup>2</sup> •K / W)
Wind Load Resistance	Tested up to ± 175 psf (8.37 kPa)
Compliance	<ul style="list-style-type: none"> <li>IBC, IRC, IECC- 2018, 2021</li> <li>ASHRAE 90.1-2019</li> </ul>
Construction Types and Fire Resistance	<ul style="list-style-type: none"> <li>I-V, NFPA 285 tested for types I-IV</li> <li>1&amp;2 hour rated walls (based on engineering judgements)</li> </ul>

### Warranty

10, 12, or 15 year Limited Warranty, depending on options selected

### Maintenance

Requires periodic cleaning to maintain appearance, repair to cracks and impact damage if they occur, recoating to enhance appearance of weathered finish. Sealants and other façade components must be maintained to prevent water infiltration.

# StoTherm® ci XPS

Decorative cladding with R-5 continuous insulation and StoGuard® Air and Water-resistive Barrier combined with Sto high performance finishes

Limitations
Minimum insulation board thickness is 1 inch (25 mm). Maximum insulation board thickness is 6 inches (305 mm) with Sto Textured Finishes. If StoCast Finishes are used on noncombustible construction maximum thickness is 2 inches (51mm) with Dupont Styrofoam Panel Core ST-100. Refer to ICC ESR 1748 for system components when used on noncombustible construction (Types I-IV).
Fire resistance rated assemblies limited to 4 inches (102mm) maximum insulation board thickness, except as noted above for noncombustible construction
Structural back-up wall must be level to ¼ inch in 10 ft (6mm in 3.0m)
Wind load resistance: ± 175 psf (8.37 kPa) ultimate loads achieved. Ultimate wind load resistance also depends on sheathing, sheathing attachment, and stiffness of supporting construction. Design for maximum allowable deflection of L/240.
Impact resistance: supplemental reinforcing mesh layers, cement board overlay or other design adjustments may be prudent for areas adjacent to heavy pedestrian traffic or other areas of high impact or abuse. Refer to Sto Guide Details.
For use on vertical above grade walls only. Do not use below grade or on roofs or roof-like surfaces.
Insulation material is flammable. Keep away from flame, ignition sources, high heat, and temperatures in excess of 165°F [74° C]).
Dark finish colors with LRV (Light Reflectance Value) < 20 are not recommended.
Air Barrier, insulation board, and base coat materials are not intended for prolonged weather exposure. Allow 180 days maximum between application of air and water-resistive barrier and insulation board.
Refer to specific component product bulletins and packaging for other limitations that may apply involving use, handling, and storage of component materials.

Sustainable Design	
Air Quality and VOC Compliance	
All finish coatings, adhesives, air barrier detail components and coatings meet US EPA (40 CFR 59) and South Coats AQMD (Rule 1113) emission standards for Building Envelope Coatings: VOC less than 50 g/L.	
Sustainability	
The system has high potential for LEED and other sustainability program credits based on efficient and effective use of a continuous air barrier and continuous exterior insulation and the resulting reductions in energy use and greenhouse gas emissions. The use of light weight metal studs and light weight finishes has positive impacts on life cycle energy use by reducing dead loads and structural support requirements when compared to mass wall and full thickness/weight veneer units. Insulation boards are available with reduced HFC blowing agent and GWP, depending on State regulatory requirements. Refer to <a href="#">Owens-Corning</a> or <a href="#">Dupont</a> for more information.	
Regulatory Compliance and Standards Testing	
ICC ESR No. 1748 covering StoTherm ci XPS	Complies with 2018 and 2021 IBC, IRC and IECC
ICC ESR No. 1233 covering StoGuard	Complies with 2018 and 2021 IBC, IRC and IECC
ASHRAE 90.1-2019	Complies with Section 5, Building Envelope, air barrier and continuous insulation requirements
ASTM E 2357	Air and Water-resistive Barrier system meets air leakage resistance criteria of ≤ 0.04 cfm/ft <sup>2</sup> at 1.57 psf (0.2 L/s•m <sup>2</sup> at 75 Pa)
NFPA 285	Meets acceptance criteria for use on Types I, II, III, IV (noncombustible) construction with up to 6 inch (152mm) thick insulation board and Sto Textured Finishes, up to 2 inch (51mm) thick with StoCast Finishes. Refer to ICC ESR-1748 for details.
ASTM E 119	Meets requirements for use over fire-resistance-rated wall assemblies (refer to ICC ESR-1748 for details) with maximum 4 inch (102mm) thick insulation board, except as noted above for noncombustible construction

<p><b>Sto Corp.</b> 3800 Camp Creek Parkway Building 1400, Suite 120 Atlanta, GA 30331</p> <p>Tel: 404-346-3666 Toll Free: 1-800-221-2397 Fax: 404 346-3119 <a href="http://www.stocorp.com">www.stocorp.com</a></p>	<p><b>SB-5300</b> Revision: 014 Date: 02/2024</p>	<p style="text-align: center;"><b>Attention</b></p> <p>Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to this product, and to the structure of the building or its components. <b>STO CORP. DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.</b> For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, <a href="http://www.stocorp.com">www.stocorp.com</a>.</p>
--	---	--