


# reStore Stucco

## Repair of Stucco Parapets and Un-capped Walls

Detail No.: 72.20.81  
Date: December 2015

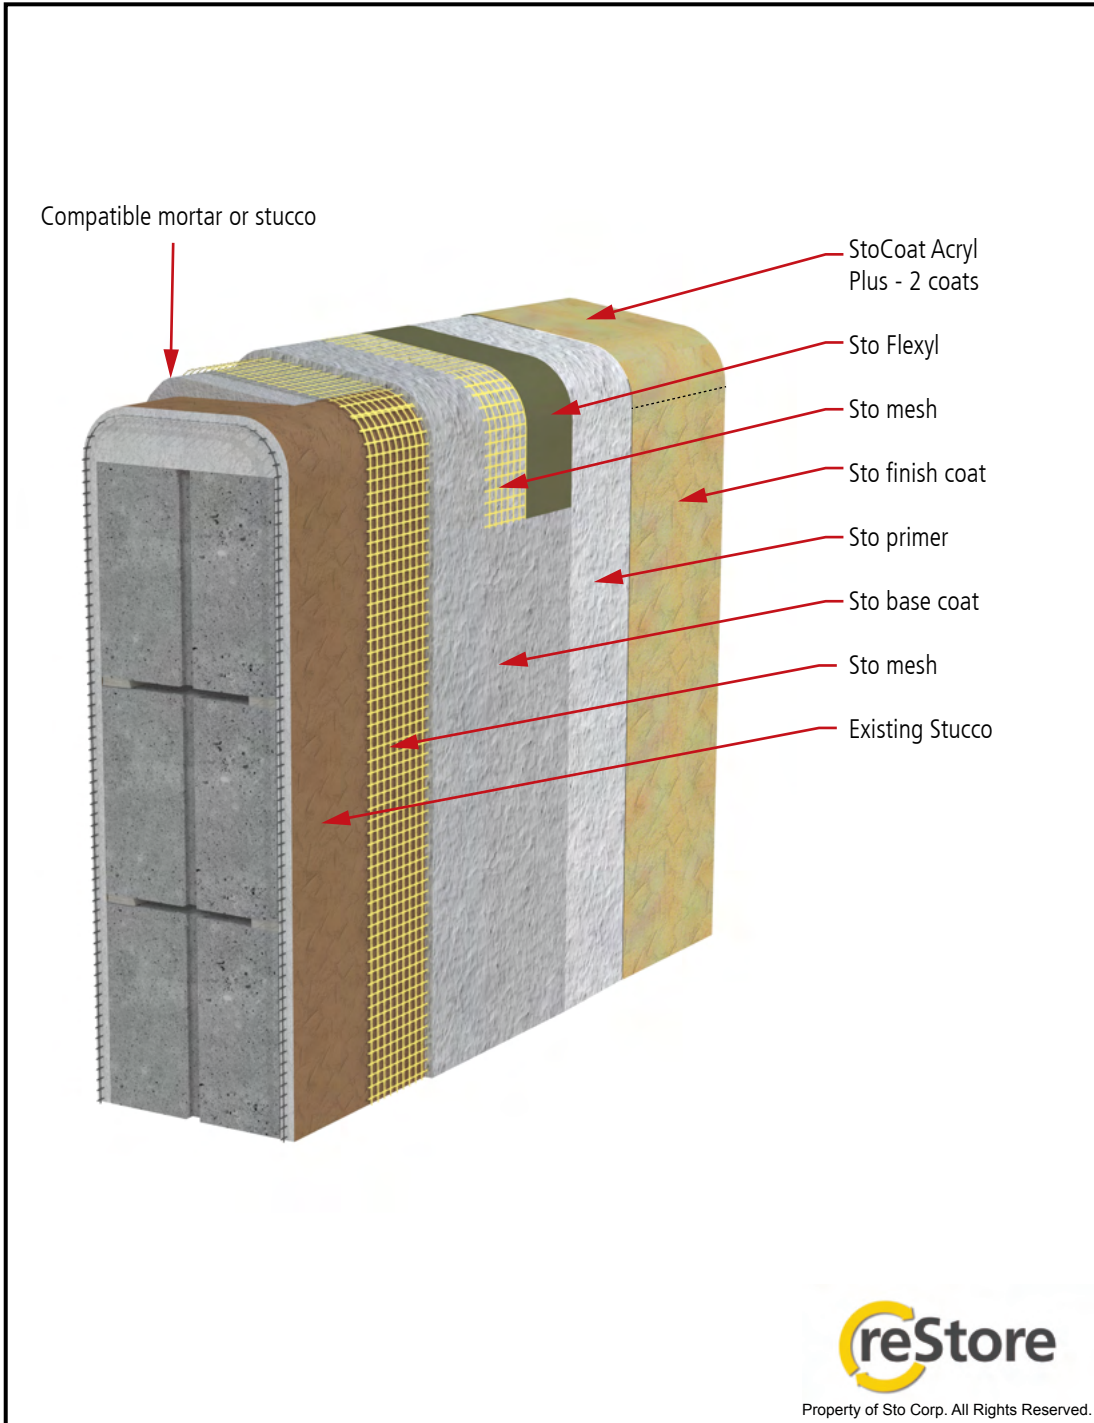

Notes:

1. In all cases, use of a properly secured metal parapet cap is recommended on parapet walls. However, this detail provides an alternate means of waterproofing an existing un-capped parapet or wall. This condition is prevalent in certain geographic regions and its use should be limited to arid climates.
2. Clean existing surfaces to remove all dust, dirt, loose materials, and other potential bond-inhibiting materials.
3. Repair cracks and spalls of the existing stucco.
4. If parapet top is flat, apply stucco brown coat or suitable cementitious repair mortar to create a slope. Angle slope such that water is directed onto the roof surface or away from the elevation which is most often viewed.
5. Apply Sto base coat with Sto mesh embedded to the entire wall, overlapping the Sto Flexyl application.
6. Apply Sto Flexyl waterproof base coat and embed Sto mesh across the top of the parapet and extending minimum 12-inches (305 mm) down the wall surface on both sides.
7. Apply Sto Primer and Sto finish.
8. Apply two coats of StoCoat Acryl Plus tinted to match finish to the top surfaces.

**IMPORTANT:** Components not identified as Sto are furnished by other manufacturers and are not necessarily installed by trades who install the Sto products. Refer to project specific contract documents.

[www.stocorp.com](http://www.stocorp.com)

**ATTENTION**

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to Sto products, and to the structure of the building or its components.

STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME. For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, [www.stocorp.com](http://www.stocorp.com).