


reStore Stucco

Clean and Recoat (cracks \leq 1/32-in. (1 mm))

Detail No.: 72.10.00
Date: September 2014

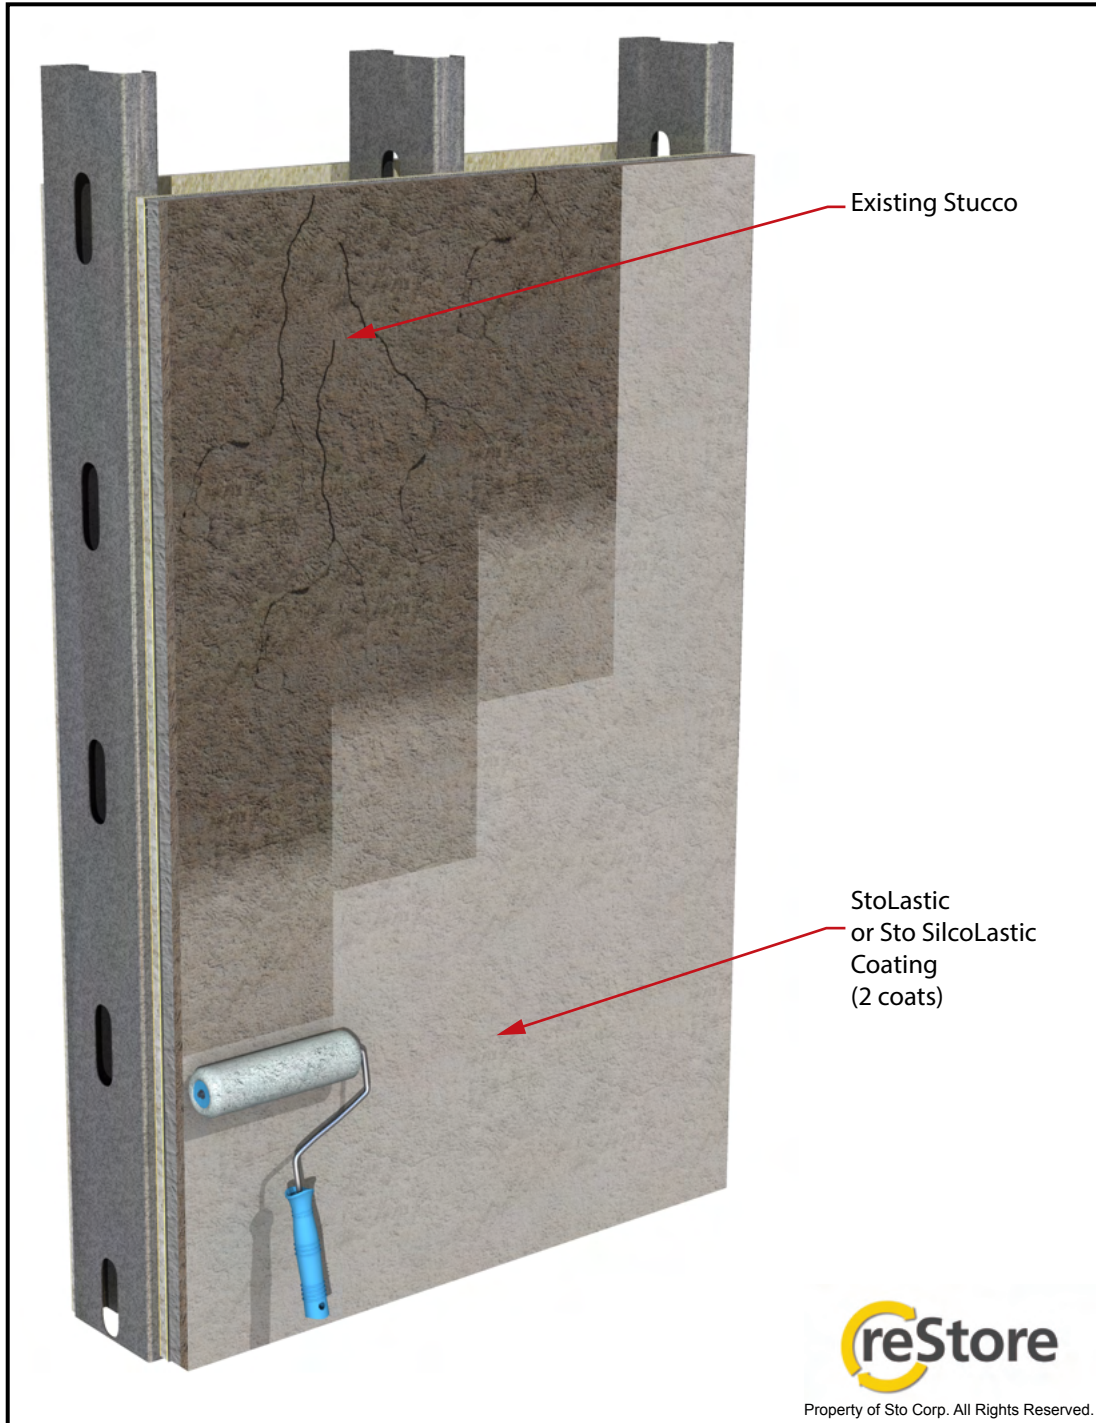

Notes:

1. Detail shows recoating of existing stucco which has fine, static cracks measuring less than 1/32-inch (1mm) wide. Sto Detail 72.20.01 provides guidance for repair of cracks up to 1/8-inch (3.2 mm) wide.
2. Clean surface of the existing stucco to remove all soil, dust, dirt, atmospheric deposits, algae, mildew and any other surface contaminants that would inhibit bond of the new coating. Comply with Sto cleaning instructions available at www.stocorp.com, and Sto reStore cleaning specification RC100.
3. Surface must be completely dry before coating. Cracks may hold water from cleaning which could be detrimental to successful coating application and performance. Ensure that surface is completely dry before starting to recoat.
4. Apply two coats of Sto architectural finish coating. Consult Sto published information and your local Sto representative for assistance selecting the appropriate Sto coating.
5. This is a conceptual detail and does not purport to show all possible conditions which may be encountered. A thorough pre-construction evaluation, including crack measurement at selected locations, is recommended to fully evaluate the cause and full extent of visible distress. The pre-construction evaluation should be conducted by a qualified restoration construction professional or qualified restoration contractor with experience performing similar work to that anticipated for the subject project.
6. This detail is a guideline detail to present options for using Sto products to address repair of visible distress. This detail must be approved by the project design professional.
7. All mixing, installation and curing of Sto products must comply with written specifications and product literature available at www.stocorp.com.

IMPORTANT: Components not identified as Sto are furnished by other manufacturers and are not necessarily installed by trades who install the Sto products. Refer to project specific contract documents.

www.stocorp.com

ATTENTION

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to Sto products, and to the structure of the building or its components.

STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME. For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.