


reStore Stucco

Projecting Feature - Flat Slope Repair

Detail No.: 72.20.73
Date: November 2015

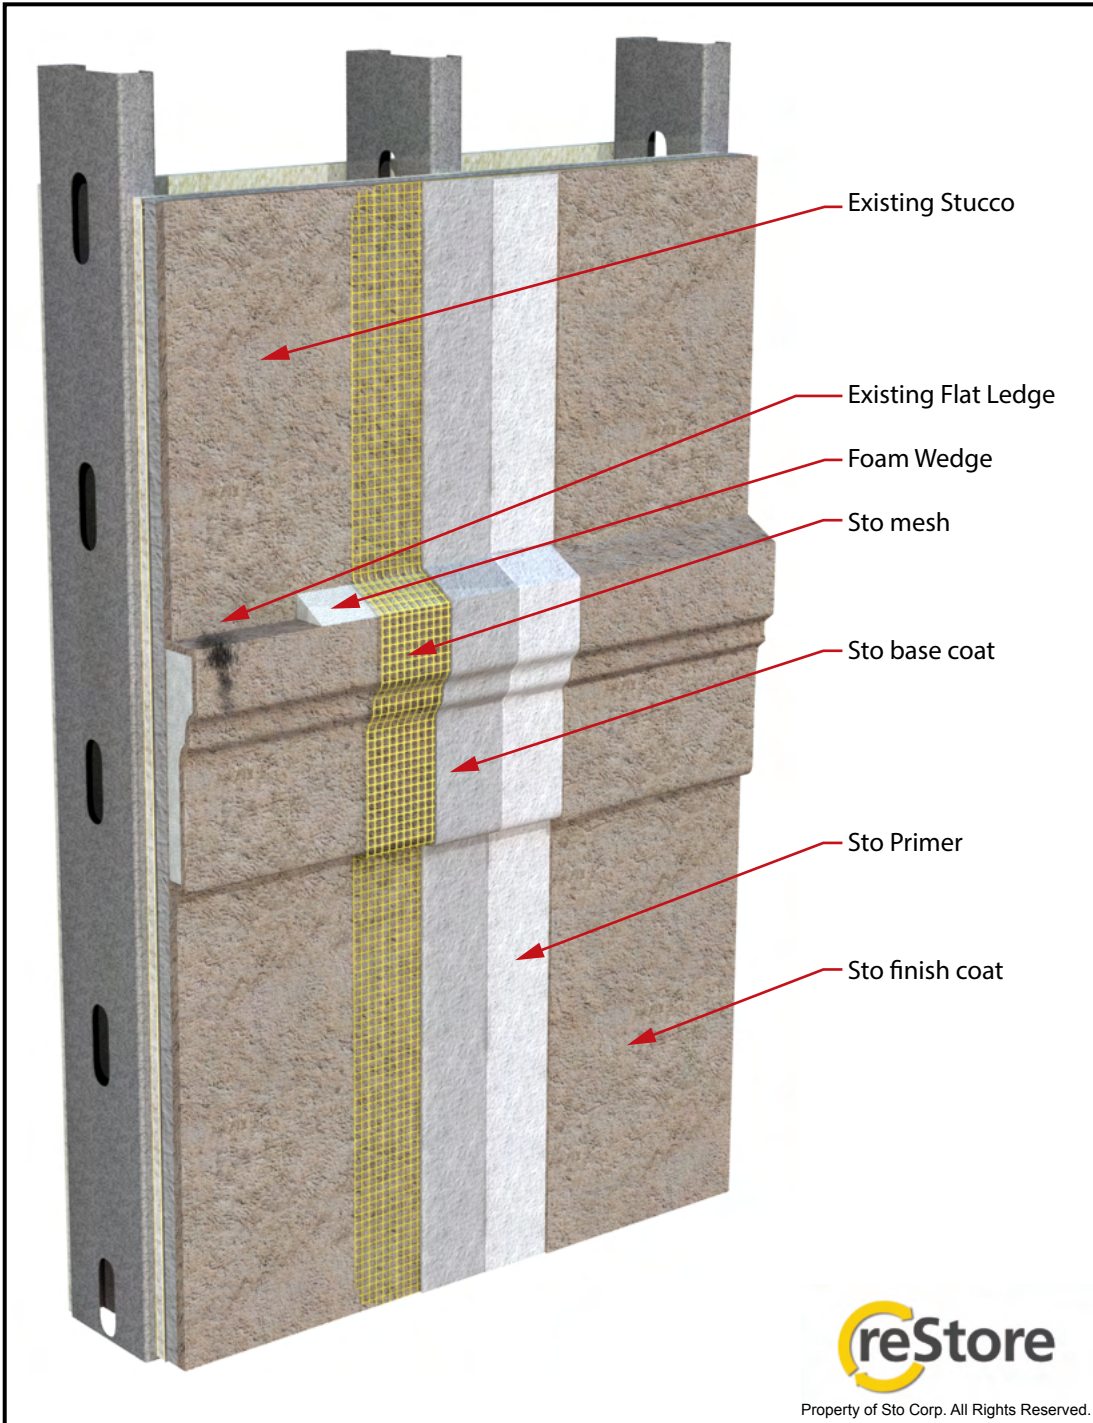

Notes:

1. Use this detail to add slope to flat tops of existing feature bands, not wider than 2 inches (50 mm), for compliance with minimum 1:2 (27 degree) slope requirement for textured finish.
2. Clean surface in accordance with Sto Specification RC 100 to remove all bond inhibiting materials including dust, dirt, oils, salts, mold, mildew and algae.
3. Adhere foam wedge (EPS or XPS) using Sto Adhesive.
4. Apply new reinforced base coat, primer, and finish in accordance with Sto Specification R 501.
5. Refer to current Sto specifications and product bulletins for additional information regarding handling, mixing and application of Sto materials.

IMPORTANT: Components not identified as Sto are furnished by other manufacturers and are not necessarily installed by trades who install the Sto products. Refer to project specific contract documents.

www.stocorp.com

ATTENTION

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to Sto products, and to the structure of the building or its components.

STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME. For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.